

SYMBOLS

- Work area
- Cone, drum or barricade
- Sign on portable or permanent support
- Arrow board
- Barricade or drum with flashing light

GENERAL NOTES

- * Cones at 8 m (25') centers for 75 m (250'). Additional cones may be placed at 15 m (50') centers. When drums or Type I or Type II barricades are used, the interval between devices may be doubled.

Where, at anytime, day or night, any vehicle, equipment, workers or their activities encroach on the pavement during shoulder operations or where construction requires lane closures and the posted limit is 70 km/h (40 mph) or less.


The L distance shall be defined as:
Metric $L = \frac{WS^2}{150}$
English $L = \frac{WS^2}{60}$

Where: W = width of closure in meters (feet), S = normal posted speed limit in km/h (mph)

If the work operation is performed between 9:00 am and 3:00 pm and does not exceed 15 minutes, traffic protection shall be as shown for Standard 701301. Signs, when required, shall be installed at 60 m, (200') spacing.

Form BT 725 is required.

All dimensions are in millimeters (inches) unless otherwise shown.

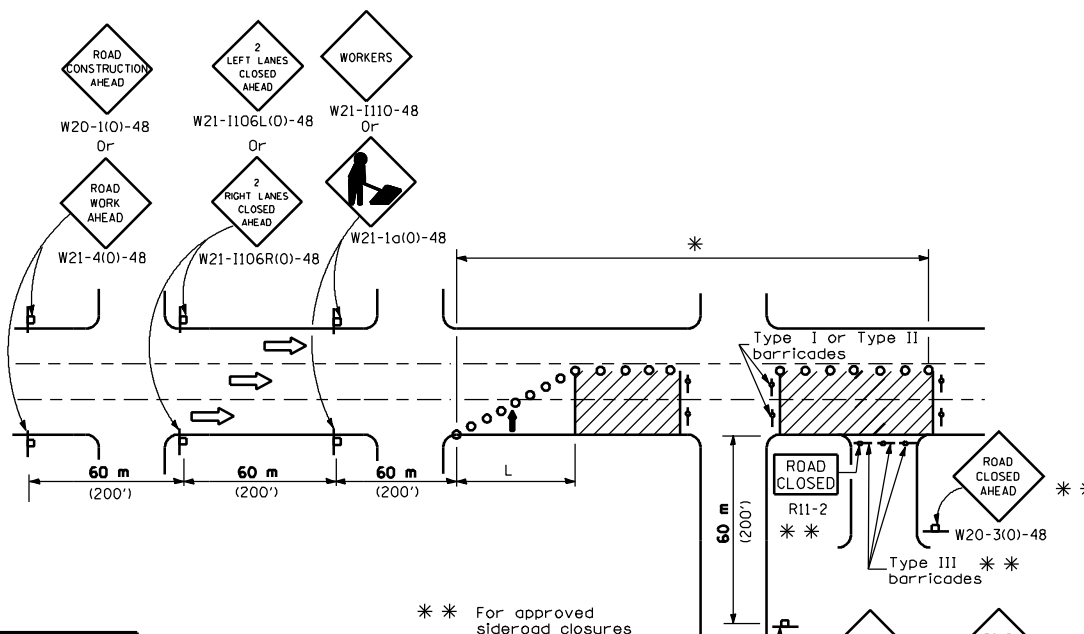

* * For approved sideroad closures

Illinois Department of Transportation	
APPROVED <u>January 1, 1998</u> <u>Bill Dunlap</u> ENGINEER OF OPERATIONS	ISSUED 1-1-97
APPROVED <u>January 1, 1998</u> <u>Bill Dunlap</u> ENGINEER OF DESIGN AND ENVIRONMENT	

DATE	REVISIONS
1-1-98	Added 48" dimension to W sign designations. Rev. "2L" to "L" in plan view.
1-1-97	Renum. Standard 2403.
	Del. orange flags. Added LANES CLOSED signs.

LANE CLOSURE MULTILANE 1W OR 2W WITH NONTRAV. MEDIAN FOR SPEEDS < 45 MPH
STANDARD 701601-01